




## 1 CONNECTIONS

Turn off power supply.



230V / 50Hz ou 120V / 60Hz  
Check product specification

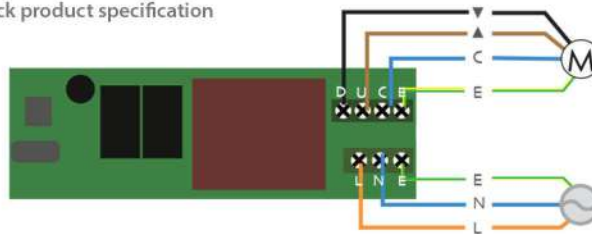

Black = down  
Brown = up  
Blue = neutral (c)  
Green / yellow = earth  
Blue = neutral  
Green / yellow = earth  
Orange = phase

## 2 PAIRING

- a Turn the power supply on. A series of 4 consecutive beeps should sound and a slight movement in the shutter.  
NB : If nothing happens, check all the connections.
- b Press **P2** or " **Set up** " button on your AvosDim control point. A beep is emitted. After about 5 seconds, press **P2** a second time, another beep should sound.
- c Press the **Up** button.  
The wired motor can now be controlled from the AvosDim remote control point.

## 3 BENEFITS

- Economic solution that avoids replacing motor from wired to remote control technology.
- Small compact design suitable for placing inside the box for roller shutters.
- Compatible with all AvosDim remote controls and automation points.

## 4 TROUBLESHOOTING

### No beep during pairing :

- As soon as the receiver is supplied with power, 4 beeps must always be emitted. Check the connections and test the electrical current. If everything is at correct level, contact the supplier.

### Electrical connection issues :

- The use of rigid wiring (1.5mm<sup>2</sup>) is strongly recommended. In case of flexible wiring, check the wires are sufficiently strong enough to make a proper connection.

### All steps followed and still no control :

- Check the battery in your control point. Our remote controls have LEDs that normally light up after each operation.
- Follow step 2 again making sure to respect the 5 seconds interval (minimum) between remote control / motor pairing.